


KEL-EMC | KEL-EMC-Z cable assembly

with shield earthing and integrated strain relief

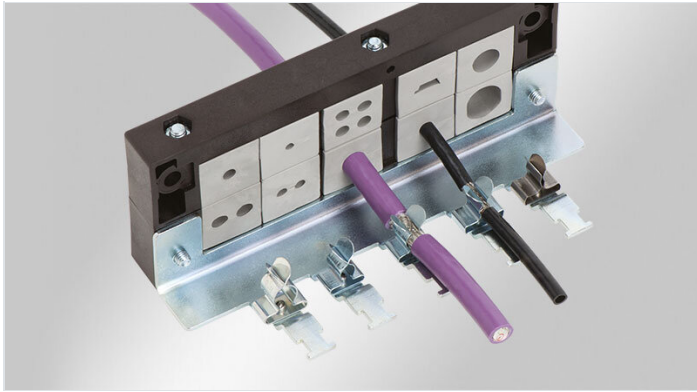

Cable entry, EMC shield earthing and strain relief – all in one location!

Cables pass through the KEL cable entry frame and lead directly to cable shield earthing and strain relief. Three functions carried out quickly and easily!

KEL-EMC-Z: Custom configurations are available for shield clamps up to 16 mm in diameter with minimal order quantities and lead time.



Specifications

Material	Mild steel, galvanically zinc plated Material: Stainless steel
Properties	vibration proof
Mounting options	Screw type mounting

Advantages & benefits

- Large surface contact between cable shield and housing, especially on conductive coated surfaces
- Easily combines cable routing, EMC and strain relief due to the use of the same mounting holes
- Available without SKL shield clamps if only additional strain relief is required
- M6 Mounting hole for earthing tape or PE connection (KEL-EMC-Z)
- Direct, easy and quick contact to the enclosure
- Space saving, usable for up to 10 cables with the two row model
- Replacement for EMC cable glands, even for pre-terminated cables

Product types & sizes


KEL-EMC-Z 24|5



Part No.	36527
EAN	4251269303074
PU	1
For no. of shield clamps	5
For max. no. of cables	5
Length L1	147 mm
Length L2	130 mm

Width	56 mm
Height	28 mm
Mounting height	28 mm
Hole size	M5 / M6
No. of screw holes	2
No. of teeth	5

KEL EMC-Z 16|4



Part No.	36525
EAN	4251269303050
PU	1
For no. of shield clamps	4
For max. no. of cables	4
Length L1	120 mm
Length L2	103 mm

Width	56 mm
Height	28 mm
Mounting height	28 mm
Hole size	M6 / M5
No. of screw holes	2
No. of teeth	4

KEL-EMC 24|5

Part No.	36526	Height	19.5 mm
EAN	4251269303067	Mounting height	19.5 mm
PU	5	No. of screw holes	2
For max. no. of cables	5	Diam. of screw holes	6 mm
Length L1	142 mm	No. of teeth	5
Length L2	130 mm		
Width	35 mm		

KEL-EMC 16|4

Part No.	36524	Height	19.5 mm
EAN	4251269303043	Mounting height	19.5 mm
PU	5	No. of screw holes	2
For max. no. of cables	4	Diam. of screw holes	6 mm
Length L1	115 mm	No. of teeth	4
Length L2	103 mm		
Width	35 mm		

KEL-EMC 10

Part No.	36522	Height	19.5 mm
EAN	4251269303036	Mounting height	19.5 mm
PU	5	No. of screw holes	2
For max. no. of cables	3	Diam. of screw holes	6 mm
Length L1	95 mm	No. of teeth	3
Length L2	83 mm		
Width	35 mm		

KEL-EMC-B

Part No.	36520	Height	19.5 mm
EAN	4251269303029	Mounting height	19.5 mm
PU	5	No. of screw holes	2
For max. no. of cables	2	Diam. of screw holes	6 mm
Length L1	70 mm	No. of teeth	2
Length L2	58 mm		
Width	35 mm		

KEL-EMC F

Part No.	39110	Height	19.5 mm
EAN	4251269305955	Mounting height	19.5 mm
PU	5	No. of screw holes	2
For max. no. of cables	3	Diam. of screw holes	6 mm
Length L1	44 mm	No. of teeth	3
Length L2	32 mm		
Width	35 mm		